



PRINTED CIRCUIT BOARD WIRING VIEW


Earth (Ground) Lines

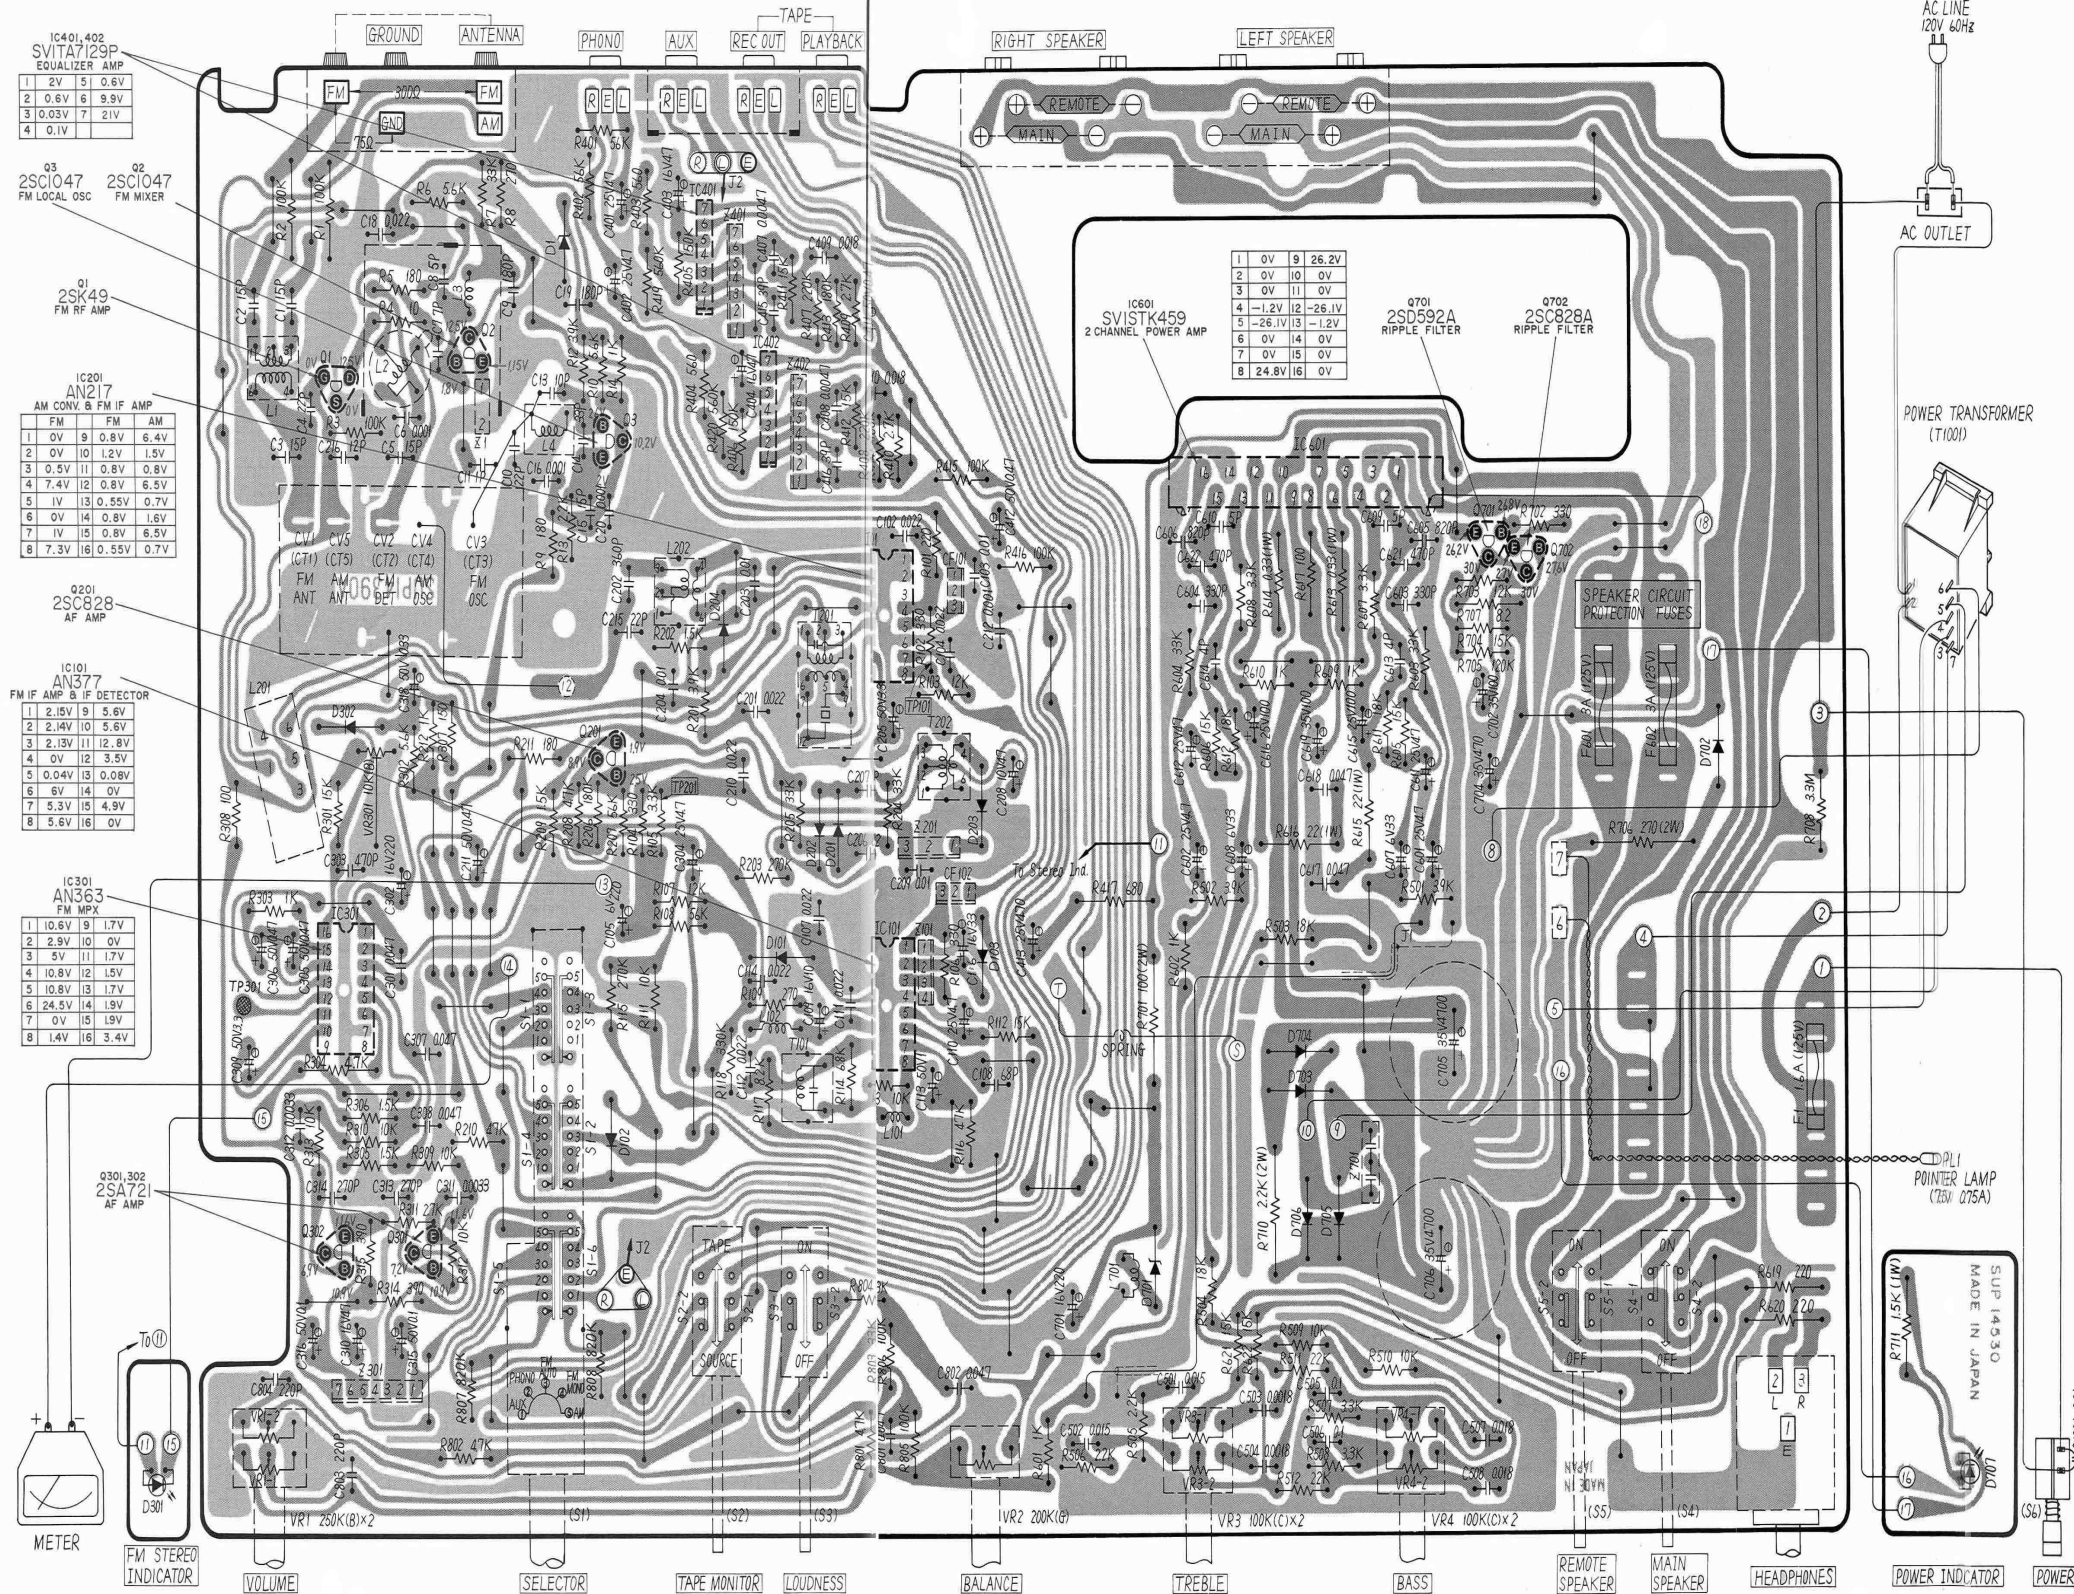


BLOCK DIAGRAM OF INTEGRATED CIRCUITS

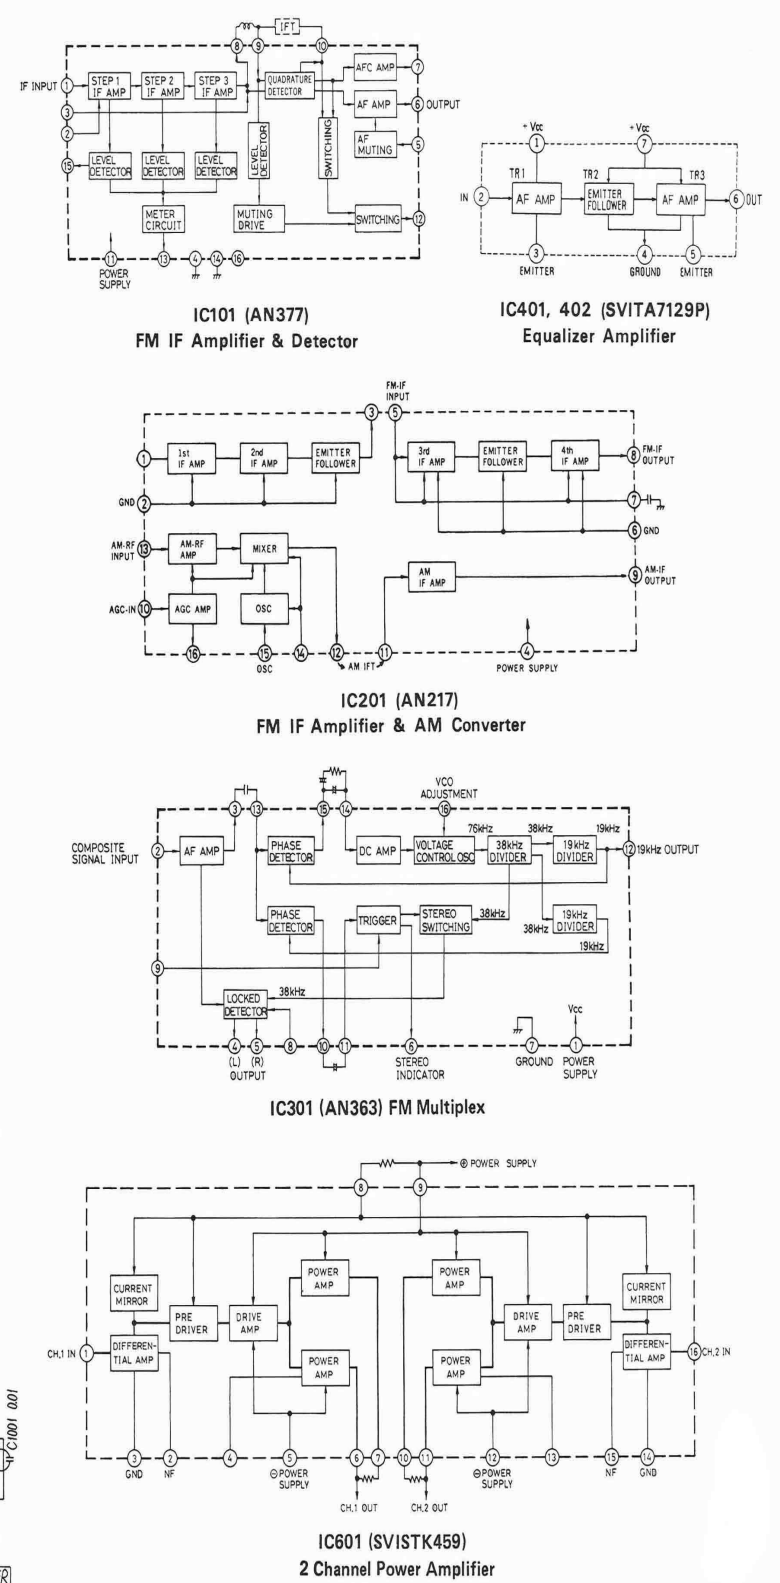

Schematic Diagram... Model SA-80

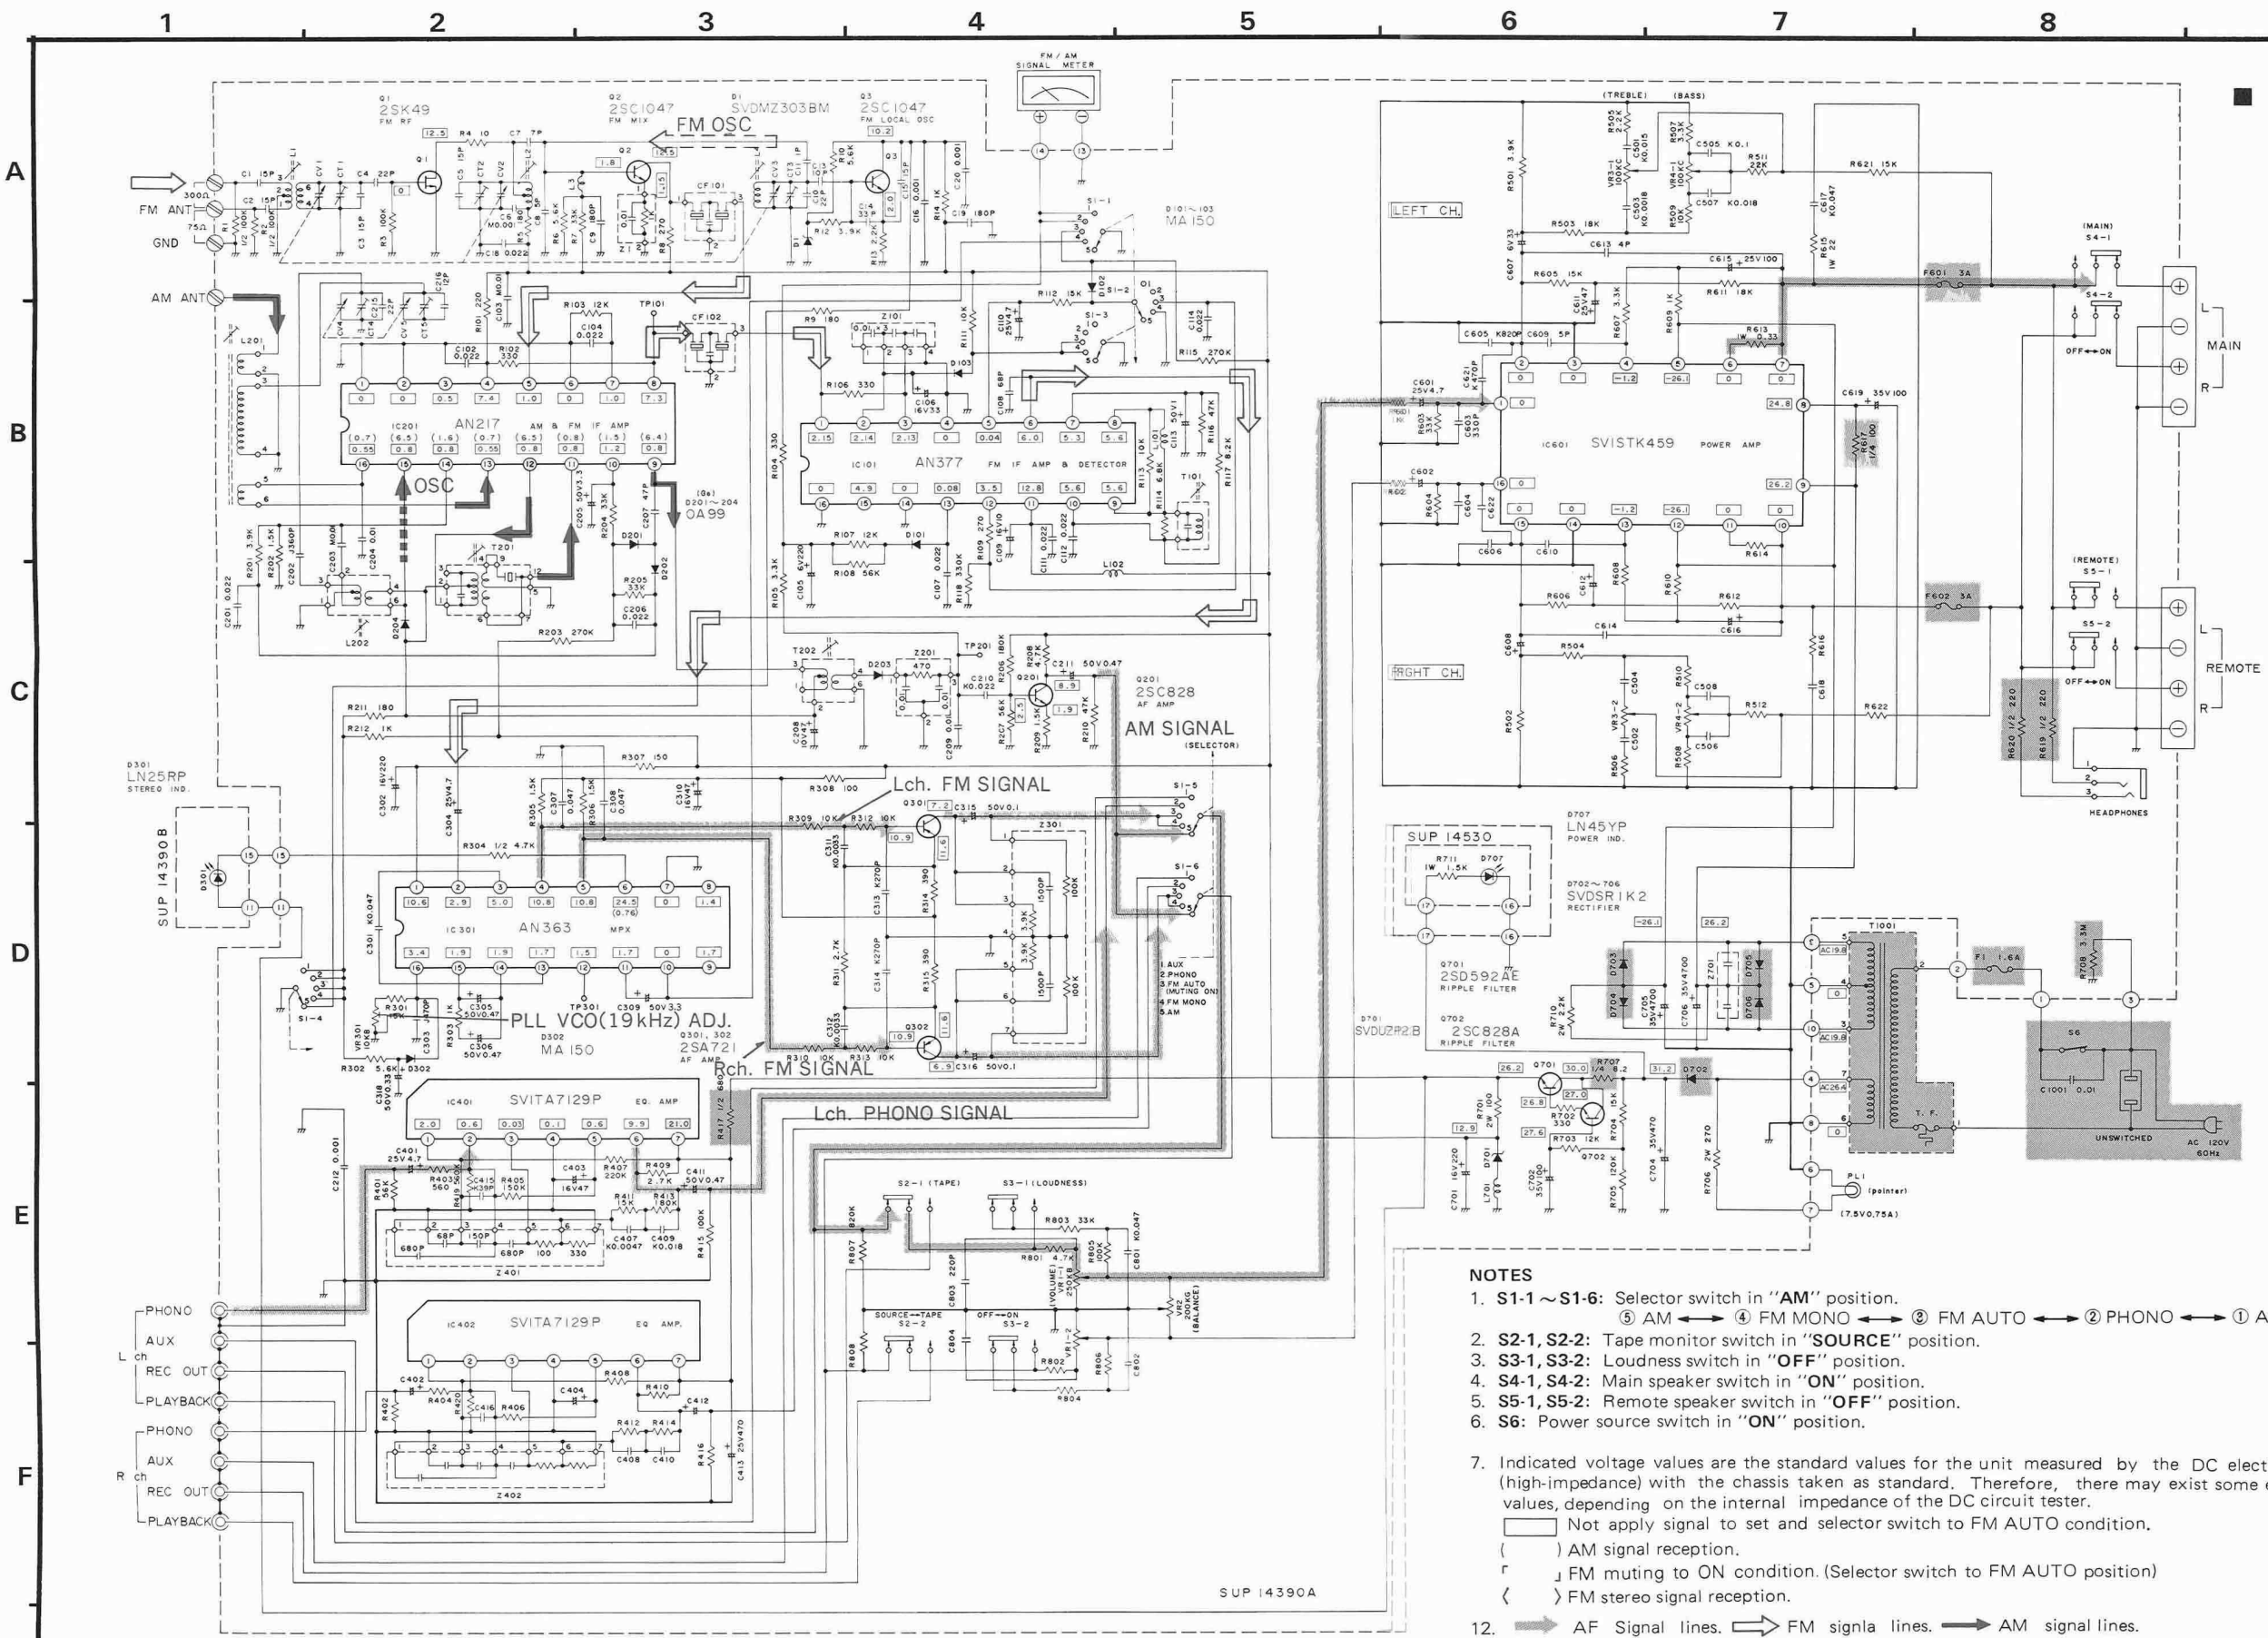

■ TERMINAL GUIDE OF TRANSISTOR AND IC

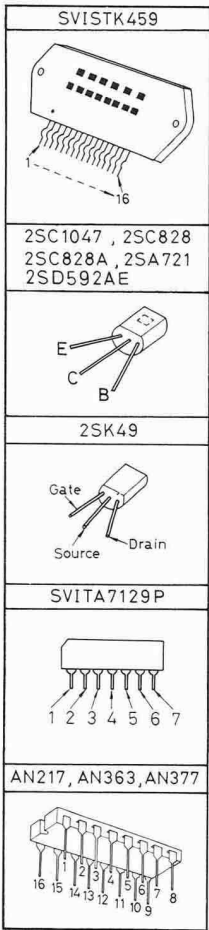

NOTES

1. S1-1 ~ S1-6: Selector switch in "AM" position.  
⑤ AM ↔ ④ FM MONO ↔ ③ FM AUTO ↔ ② PHONO ↔ ① AUX
2. S2-1, S2-2: Tape monitor switch in "SOURCE" position.
3. S3-1, S3-2: Loudness switch in "OFF" position.
4. S4-1, S4-2: Main speaker switch in "ON" position.
5. S5-1, S5-2: Remote speaker switch in "OFF" position.
6. S6: Power source switch in "ON" position.
7. Indicated voltage values are the standard values for the unit measured by the DC electronic circuit tester (high-impedance) with the chassis taken as standard. Therefore, there may exist some errors in the voltage values, depending on the internal impedance of the DC circuit tester.  
□ Not apply signal to set and selector switch to FM AUTO condition.  
( ) AM signal reception.  
┌ FM muting to ON condition. (Selector switch to FM AUTO position)  
< FM stereo signal reception.
12. ➡ AF Signal lines. ➡ FM signal lines. ➡ AM signal lines.
13. This schematic diagram may be modified at any time with the development of new technology.